



UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.C14780

First Named Inventor or Application Identifier

TOSHIAKI SAITO

Express Mail Label No.

Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages
3. ☒ Drawing(s) (35 USC 113) Total Sheets
4. ☒ Patent Application Bibliographic
Data Sheet Total Sheets
5. ☐ Oath or Declaration Total Pages
- a. ☐ Newly executed (original or copy)
- b. ☐ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 6 below]
- i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Incorporation By Reference (useable if Box 5c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 5c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein. The incorporation can
only be relied upon when a portion has been inadvertently omitted
from the submitted application parts.

7. ☐ Microfiche Computer Program (Appendix)
8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
16. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
17. ☐ Other: _____

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/_____
Prior application information: Examiner _____ Group/Art Unit: _____

19. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

NAME				
Address				
City	State	Zip Code		
Country	Telephone	Fax		



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	12-20 =	0	X \$ 18.00 =	\$0
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	6-3 =	3	X \$ 78.00 =	\$234.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$690.00
	Total of above Calculations =				\$924.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				0
	TOTAL =				\$924.00

20. Small entity status


- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

21. ☒ A check in the amount of \$ 924.00 to cover the filing fee is enclosed.

22. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

23. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	LEONARD P. DIANA
SIGNATURE	 29,296
DATE	September 6, 2000

INVENTOR INFORMATION

Inventor One Given Name:: TOSHIAKI

Family Name:: SAITO

Postal Address Line One:: 25-2, Mizukino 5-chome, Moriya-machi

Postal Address Line Two:: Kita Soma-gun

City:: Ibaraki-ken

Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514

Fax:: (212) 218-2200

APPLICATION INFORMATION

Title Line One:: COLOR IMAGE COMMUNICATION APPARATUS

Total Drawing Sheets:: 9

Formal Drawings?:: Yes

Application Type:: Utility

Docket Number:: 35.C14780

Secrecy Order in Parent Appl.?:: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 05514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-257340

Filing Date:: 09-10-99

Country:: JAPAN

Priority Claimed:: Yes

COLOR IMAGE COMMUNICATION APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to an image communication apparatus capable of receiving color and monochrome images.

Related Background Art

10 With the heightened functionality of an image recorder, an image display device or the like in recent years, a color copying machine, a color printer, and so on, have gained more in popularity. For the image communication apparatus, color facsimile devices have been developed.

15 As regards a color facsimile communication system, standardization has been pursued with ITU-T Recommendations and, currently, T30, T4, T42 and T81 are in practice.

20 As regards a color recording system, there has been known an ink jet system or the like, which enables a user to select one from a black and other color ink cartridge as an ink cartridge to be loaded.

25 In the conventional color facsimile device, however, memory alternative reception was set when no color ink cartridges were present or when color reception was carried out. This situation made it impossible to record received images indefinitely,

leaving color reception documents on a memory.
Therefore, a limitation was placed on a usable memory
and, in the reception/transmission process thereafter,
a processing speed was adversely affected because of
5 such a memory limitation. In addition, a large-
capacity memory was needed to secure a sufficient
usable memory, resulting in cost increases.

On the other hand, because of a high price of a
color cartridge, in the facsimile machine, color
10 reception or recording was carried out if not desired.

SUMMARY OF THE INVENTION

The present invention has been made to solve the
foregoing problems, and an object of the invention is
15 to provide a color image communication apparatus and
its control method.

Another object of the invention is to provide an
image communication apparatus and a method, capable of
making proper ability declaration for its own according
20 to the state of a recording unit of received image or
the permission of memory reception.

Other objects of the invention will become
apparent upon a reading of the following detailed
description based on appended drawings and claims.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a configuration

of a color image communication apparatus.

Fig. 2 is a perspective view showing an appearance of the color image communication apparatus.

Fig. 3 is a plan view showing an operation panel
5 of the color image communication apparatus.

Fig. 4 is a block diagram showing a data flow during image transmission.

Fig. 5 is a block diagram showing a data flow during image reception.

10 Fig. 6 is a view showing a color communication process.

Fig. 7 is a view showing a data structure of JPEG base line coded data.

Fig. 8 is a flowchart showing a process during
15 call incoming.

Fig. 9 is a flowchart showing a process during reception.

Fig. 10 is a flowchart showing a DIS signal generation process during reception.

20 Fig. 11 is a flow chart showing a color reception ability judgement process during reception.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS (First embodiment)

25 Next, the preferred embodiments of the present invention will be described in detail with the accompanying drawings.

Fig. 1 shows a first embodiment of the invention.

An image communication apparatus of the described embodiment is a facsimile device, which is provided with a G3 facsimile function and used by being
5 connected to an analog telephone line. This device also includes a color image transmitting/receiving function.

In Fig. 1, a CPU 1-1 controls the entire device, and a ROM 1-2 is used as a program memory for various control operations executed by the CPU 1-1. A RAM 1-3
10 is used as a work area or the like for the CPU 1-1, backed up by a battery and adapted to prevent the volatilization of a stored content.

A codec unit 1-4 includes a raster/block
15 conversion unit, a color converter and a JPEG encoding unit to constitute a transmission system, and a block-raster conversion unit, a color converter and a JPEG decoding unit to constitute a reception system. This codec unit 1-4 also includes a JPEG codec and a color
20 conversion circuit, which are respectively designed to convert, when color component signals of RGB (Red, Green and Blue) are entered each as a multivalued signal of 8 bit/pixel, the signals into L*a*b* signal components, then execute JPEG base line encoding and
25 output its result, and to decode, conversely when JPEG base line coded data is entered, the data to obtain each 8-bit multivalued data regarding L*a*b*, then make

conversion from L*a*b* into CMYK and output its result.

A modem unit 1-5 is compliant with V8/V34/V17/V29/V27 ter of ITU-T Recommendation, and designed to modulate/demodulate a transmitted/received
5 signal. A network control unit (NCU) 1-6 performs control or the like for connection with a telephone network. A timer circuit 1-7 includes a clock LSI or the like having a calendar function.

An operation panel 1-8 includes various operation
10 keys and a display unit. An image memory 1-9 is composed of a semiconductor memory, and controlled in such a way as to store image data per page unit.

A color scanner 1-10 optically reads a document, decomposes the read data into RGB components, and
15 outputs each color pixel as 8-bit multivalued data. In the embodiment, a color contact sensor is used as a reading device, and ADF mechanism is provided to automatically carry a plurality of documents to a reading position.

20 A printer interface unit 1-11 includes a binarization unit and an interface control unit, and controls connection with a printer unit 1-12 by a general-purpose interface based on Centronics specifications. When a multivalued signal of each CMYK
25 color is entered, the general-purpose interface is controlled to convert each color data into binary data and transmit it to the printer. The printer interface

unit 1-11 also has a function of detecting the state of the printer through the interface and notifying it to the CPU 1-1.

The printer unit 1-12 can perform color recording by an ink jet recording system. Ink cartridges to be loaded include ones for black and white recording, color recording, high-definition color recording, and so on. The type of a loaded cartridge is detected by a sensor provided in the printer unit 1-12, and recognized by the CPU 1-1 through a printer interface. The communication apparatus further comprises a general-purpose interface 1-13, and a CPU bus 1-14.

Fig. 2 is a perspective view showing an appearance of the described communication apparatus, and Fig. 3 is a plan view showing an appearance of the operation panel 1-8.

In Fig. 1, a document base 2-1 for setting documents are provided on the upper surface of a device casing, and a document guide is provided to prevent oblique feeding during document carrying. The operation panel 1-8 is provided above the document base. A document ejection tray 2-3 is provided in the rear side of the operation panel 1-8. In the front face of the device casing, a recording paper ejection unit 2-4 is provided. Below the ejection unit 2-4, first and second recording paper cassettes 2-5 and 2-6 are loaded to set recording paper sheets. For example,

A4-size paper sheets can be set in the first cassette 2-5; and letter-size paper sheets in the second cassette 2-6. The size or type of recording paper kept in each cassette can be recognized by a sensor (not shown).

In Fig. 3, a ten key 3-1 is composed of 12 types of keys including numerals 0 to 9 and symbols # and *, and mainly used as input unit for telephone numbers. In an LCD display unit 3-2, display is made to verify the entry of a device state or a telephone number.

A one-touch key 3-3 is used when a destination number or the like written beforehand in the RAM 1-3 and transmitted with one operation. A start key 3-4 instructs transmission start, and so on, and a stop key 3-5 is used when an on-going operation is stopped.

A color key 3-6 instructs processing for a color document, and lamps are respectively attached to the outer frame portion and the inner side of the key 3-6. Color communications are enabled by depressing this key. Switching is made between color processing and monochrome process for each depressing of the key. A reference numeral 3-7 denotes the lamp attached to the inner side of the color key 3-6. A color indicator lamp 3-8 is lit while the printer unit 1-12 is in a color recordable state.

A resolution selection key 3-9 is used to change resolution for reading a document, and a state is

changed for each depressing of this key. Control is performed so as to enable the coarseness of an image transmitted by using the resolution selection key 3-9 to be adjusted.

5 Fig. 4 is a block diagram illustrating the flow of transmitted image data according to the embodiment; Fig. 5 a block diagram illustrating the flow of received image data. Now, description will be made by sequentially referring to Figs. 4 and 5.

10 First, during transmission, a document 4-7 is read at the color scanner unit 1-10 including a color contact sensor 4-9 by a white color light source 4-8. Each analog signal decomposed in three primary colors of RGB is converted into 8-bit digital data for each
15 color, and then outputted from the scanner unit 1-10 onto the CPU bus.

 In the case of color reading, image data is entered through the CPU bus to the codec unit 1-4, and full-white data is added as invalid data to a portion
20 exceeding a document effective size so as to reach a main scanning size of a page defined by ITU-T Recommendation in the buffer memory 4-4 of the codec unit 104. Then, the data is subjected to raster/block conversion at a raster/block conversion unit 4-1. In
25 this raster/block conversion, since 8-bit data are transferred in the order of R , G and B as raster signals, these data are re-arrayed in the block matrix

of 8x8 pixels for respective components to form data of block sequence, i.e., in the order of R block, G block., B block, R block, and so on.

Subsequently, L*a*b* block sequence data are
5 obtained from RGB by performing widely-known color space conversion for the RGB data of the block sequence at a color space conversion unit 4-2. JPEG encoding is carried out for this data stream, and outputted from the codec unit 1-4 to the image memory 1-9. The JPEG
10 coded data stored in the image memory 1-9 is transferred to a modem unit 105, and transmitted from an NCU 1-6 to a communication line.

Next, the flow of image data during a reception operation will be described by referring to Fig. 5.

15 Image data received from the line through the NCU 1-6 and the modem unit 1-5 is temporarily entered to the image memory 1-9. In the case of a color image, it is transferred from the image memory 1-9 to the codec unit 1-4.

20 In the codec unit 1-4, the received data is first decoded at a JPEG base line decoding unit 5-3. L*a*b* block sequence data are obtained, and then these data are converted into the block sequence data of cyan, magenta and yellow (CMY) color space at a color space
25 conversion unit 5-2.

Then, the CMY block sequence data are sequentially converted into raster data streams of respective CMY

colors at a block/raster conversion unit 5-1, an effective image data area thereof being extracted at a buffer memory 5-4, and then outputted to the printer interface unit 1-11. In the printer interface unit 1-11, each of the entered data streams is computed to extract a black component, separated into CMYK colors, binarized and transferred to the printer unit 1-1.

No mention is necessary for a method used in the foregoing process to generate CMYK color binary raster data at the end from L*a*b* multivalued block data, because it has already been known widely.

Fig. 6 is a view showing an example of a color image communication process, which is a basic flow based on ITU-T T30 Recommendation. At phase B, a called side (receiving side) declares color image reception ability as the ability of its own terminal by a DIS signal (self machine ability declaration signal) if color reception is enabled. A calling side (transmitting side) verifies, in the case of color transmission, the color reception ability of a receiver, and instructs color image transmission by a DIS signal. At phase C, color image data subjected to JPEG encoding and compression is divided by ECM block units and then transmitted.

Fig. 7 is a view showing an example of a data structure regarding JPEG encoded data in color image communications based on ITU-T T14 and T81

Recommendations.

One-page data is composed of an image frame held between SOI and EOI markers. This image frame is divided into a so-called JPEG header section including APP1, DQT, DHT, COM, SOF0 markers, and so on, after SIO, and a JPEG compression data section starting from an SOS marker.

In the color communication process based on ITU-T T30 and T4 Recommendations, the method of using the APP1 maker is defined as G3 FAX. The DQT marker defines a quantization table for JPEG compression, and an image compression rate/image quality is changed by this quantization table. The DHT marker defines Huffman table. The COM marker is one, in which comments can be written. This COM marker can be ignored during decoding according to ITU-T T4 Recommendation. The SOF0 marker defines various parameters for base line DCT compression, and includes the numbers of main and sub scanning pixels of image data. Because of a facsimile configuration, if the number of sub-scanning pixels is indefinite during the JPEG compression of image data, the number of sub-scanning pixels on the SOF0 marker is set equal to 0 and, after the compression data section started with the SOS marker, the number of sub-scanning pixels of the compressed image data can be set again by a DNL marker.

Next, the embodiment of the invention will be described by referring to Figs. 8, 9, 10 and 11.

Fig. 8 is a flowchart showing an operation during call incoming.

5 In S802, a call incoming from the line is monitored and, if a call is present, then judgement is made as to the reception of the call.

First, in S803, based on alternative memory reception permission SW to be set beforehand, a user
10 judges whether setting has been made or not to permit alternative memory reception when a received document can not be recorded because of no paper sheets, paper jamming, no ink or the like. If alternative memory reception is permitted, a call is received in S808,
15 connection is made to the line, and a facsimile reception operation is executed thereafter. If alternative memory reception is not permitted, then in S804, the state of the printer is monitored, and judgement is made as to the presence of a printer error
20 such as no recording paper, no cartridges or the like. If a printer error is present, call rejection is executed in S809 because a received document cannot be recorded. If no printer errors are present, another judgement is made as to the availability of black ink
25 of a loaded cartridge in S805. If there is no black ink, call rejection is also executed in S809 because a facsimile document cannot be recorded. Subsequently,

whether the loaded cartridge is a high-definition cartridge or not is determined. If not a high-definition cartridge, call reception is executed in S808. In the case of a high-definition cartridge, however, in S807, based on SW to be set beforehand, the user judges whether setting has been made or not to automatically record the received document (including black and white document) by using the high-definition color cartridge. If the automatic recording of the received document is not carried out by using the high-definition cartridge, call rejection is executed in S809. If the received document is recordable with the high-definition cartridge, call reception is executed in S808.

Fig. 9 is a flowchart showing a receiving operation after the call is received and the line is connected. First, after a response is made to the call (S1100), DIS signal generation (see Fig. 10) is executed (S1101), and a DIS signal is transmitted (S1102). Then, the process is placed on standby for a DCS signal from the transmitting side (S1103) and, if reception is permitted, a CFR signal is transmitted (S1104). Then, image data is received (see Fig. 11), and the received data is stored in the image memory (S1105). Upon receiving a Q signal from the transmitting side (S1106), an MCF signal verifying reception is sent out (S1107). Based on the Q signal,

whether a next page is present or not is determined (S1108). If there is a next page, the process is repeated from S1105 or S1101. If a next page is absent, upon receiving a DCN signal (S1109), the communications are ended.

Fig. 10 is a flowchart showing the foregoing DIS signal generation (S1101).

First, judgement is made as to whether color reception is enabled or not as a reception ability (S1201, and S1202). The judgement as to the color reception ability of the embodiment will be described later by referring to Fig. 11. If color reception is impossible, skipping steps to S1204, a reception ability declaration parameter (resolution, recording paper size or the like) other than the color reception ability is set for the DIS signal. If color reception is enabled, then a parameter indicating the color reception ability is set for the DIS signal (S1203), a reception ability declaration parameter other than the color reception ability is set for the DIS signal (S1204), and then the DIS signal generation is finished.

Fig. 11 is a flowchart showing the foregoing color reception ability judgement of S1201.

In S1302, based on color reception permission SW to be set beforehand, the use judges whether setting has been made or not to enable color reception. If

color reception is impossible, in S1308, the process is finished understanding that a color reception ability is absent. If color reception is enabled, in S1303, based on alternative memory reception permission SW to be set beforehand, the user judges whether setting has been made to not to permit alternative memory reception of the received image. If alternative memory reception is permitted, in S1309, the process is finished understanding that a color reception ability is present. If alternative memory reception is not permitted, then in S1304, by cartridge judging unit, determination is made as to the loading of a color cartridge in the printer unit. If no color cartridges are loaded, in S1308, the process is finished understanding that a color reception ability is absent. If a color cartridge is loaded, in S1305, by color ink residual quantity detecting unit, judgement is made as to the no-ink state of any one of color ink in the loaded color cartridge. If any one of color ink is absent, then in S1308, the process is finished understanding that a color reception ability is absent. If no color ink is absent, then in S1306, whether the loaded color cartridge is a high-definition color cartridge or not is determined. If it is a normal color cartridge, then in S1309, the process is finished understanding that a color reception ability is present. If it is a high-definition color cartridge,

then in S1307, based on automatic recording permission SW with the high-definition color cartridge to be set beforehand, the user judges whether setting has been made or not to enable the automatic recording of the received document by using the high-definition color cartridge. If the automatic recording of the received document by using the high-definition color cartridge is enabled, then in S1309, the process is finished understanding that a color reception ability is present. If the automatic recording of the received document by using the high-definition color cartridge is not enabled, then in S1308, the process is finished understanding that a color reception ability is absent. (Other embodiments)

15 The embodiment has been described with particular reference to the facsimile device conducted in such a manner that one of the monochrome cartridge, the color cartridge and the photographic recording high-definition color cartridge (hypochromic cartridge) can be selectively loaded.

 However, the invention is not limited to such. For example, even in the case of the facsimile device capable of selectively loading any one of the monochrome cartridge and the color cartridge, the object of the invention can be achieved by skipping all the steps of checking the hypochromic cartridge in the foregoing process.

The embodiment has also been described by the taking the example of the facsimile device using the recording unit based on the ink jet system. However, the invention is not limited to such. For example, the
5 object of the invention can be achieved by using a laser beam color printer based on an electrophotographic system for the recording unit, and providing the printer with, e.g., a mechanism, which enables the user to selectively load one of a toner
10 color cartridge for monochrome recording, a color toner cartridge for general color recording and a superfine particle color toner cartridge for high-definition recording.

According to the foregoing embodiments, especially
15 one based on the ink jet recording system, a high density and high definition can be achieved for recording by providing unit (e.g., an electrothermic converter, a laser light or the like) for generating thermal energy as energy used for ink discharging, and
20 using a system to cause a change in the ink state by the thermal energy.

As regards a representative configuration and principle thereof, for example, one of basic principles disclosed in U.S. Patent No. 4,723,129 and No.
25 4,740,796 should preferably be used. This system can be applied to both of on-demand and continuance types. The on-demand type is particularly effective in that by

applying at least one driving signal to the electrothermic converter correspondingly arranged on a sheet or a liquid path holding liquid (ink), the signal being for giving a rapid temperature increase exceeding
5 film boiling corresponding to recording information, thermal energy is generated in the electrothermic converter, and film boiling is caused to occur on the heat application surface of a recording head and, as a result, air bubbles can be formed in the liquid (ink)
10 corresponding one to one to the driving signal. The growth/compression of the air bubbles discharges the liquid (ink) through a discharge opening, forming at least one drop. The pulse formation of this driving signal is more preferable, because it instantly causes
15 proper growth/compression of the air bubbles, achieving liquid (ink) discharging with particularly high responsiveness.

As regards a pulse-shaped driving signal, suitable one may be selected from those described in U.S. Patent
20 No. 4,463,359 and No. 4,345,262. If conditions described in the invention disclosed in U.S. Patent No. 4,313,124 regarding the temperature increase rate of the heat application surface, much better recording can be carried out.

25 As regards the configuration of the recording head, in addition to the foregoing configuration combining the discharge port, the liquid path and the

electrothermic converter, a configuration including a heat application surface arranged in a bent region, disclosed in U.S. Patent No. 4,558,333, and a configuration disclosed in U.S. Patent No. 4,459,600 are also included in the present invention. In addition, one may also be selected from Japanese Patent Application Laid-Open No. 59-123670 (1984) disclosing a configuration where a slot common among a plurality of electrothermic converters is set as a discharge portion thereof, and Japanese Patent Application Laid-Open No. 59-138461 (1984) disclosing a configuration where an opening for absorbing the pressure wave of thermal energy is set corresponding to a discharge portion.

Further, for a full-line type recording head having a length corresponding to a maximum recording medium width, in which a recorder can perform recording, one may be selected from a configuration like that disclosed in the foregoing publication, satisfying the length by using a plurality of recording heads in combination, and a configuration using one integrally formed recording head.

In addition, one may be selected from the recording head of a cartridge type including an ink tank integrally provided in the recording head itself described above with reference to the embodiment, and the recording head of a freely changeable chip type, which is loaded on the device main body to enable

electrical connection to be made to the device main body, and ink to be supplied therefrom.

5 The addition of recovery unit, alternative unit, and so on for the recording head to the foregoing recorder configuration is preferable, because a recording operation can be made more stable. Specifically, capping unit, cleaning unit, pressure or suction unit, alternative heading unit such as an electrothermic converter, a heading device different
10 from the electrothermic converter or a combination of these are available for the recording head. The addition of an alternative discharge mode for performing discharging separate from recording is also effective for stable recording.

15 Ink may be one hardened at a room temperature or lower, or one softened or liquefied at the room temperature. Alternatively, in the case of the ink jet system, since ink itself is subjected to temperature control such that ink viscosity can be kept within a
20 stable discharge range by making a temperature adjustment within the range of 30°C to 70°C, any can be used at the time of imparting a recording signal to be used as long as ink is a liquid form.

25 In addition, ink hardened in a left state and liquefied by heating may be used to actively prevent a temperature increase caused by thermal energy by using it for the state change of ink from solid to liquid, or

to prevent ink evaporation. In any case, the invention is applicable to the use of ink liquefied by the application of thermal energy according to a recording signal and discharged in a liquid form, or ink having a characteristic of being never liquefied before the application of thermal energy, such as one, hardening thereof having already been started at a point of time when the recording medium is reached. In such a case, the ink may be placed oppositely to the electrothermic converter in the state of being held in a liquid or solid form in the porous sheet concave portion or the through-hole like that disclosed in Japanese Patent Application Laid-Open No. 54-56847 (1979) or Japanese Patent Application Laid-Open No. 60-71260 (1985). In the invention, a most effective method for each of the foregoing ink is the execution of the film boiling system.

As regards the recorder of the invention, in addition to one provided unitedly or separately as the image output terminal of an information processor such as a computer, a copying device combined with a reader or the like may be employed.

The invention may be applied to a system composed of a plurality of devices (e.g., a host computer, an interface device, a reader, a printer, and so on), or to a device composed of one equipment (e.g., a copying machine, a facsimile device or the like).

Needless to mention, the object of the invention can also be achieved by supplying a storage medium (or a recording medium) containing a software program code recorded to realize the function of the foregoing

5 embodiment to the system or the device, and causing the computer (or CPU, MPU) of the system or the device to read the program code stored in the storage medium and execute it. In this case, the program code itself read from the storage medium realizes the function of the

10 embodiment, and the storage medium having stored the program code constitutes the present invention. In addition to the realization of the function of the embodiment, needless to mention, the execution of the program code read by the computer causes an operating

15 system (OS) or the like running on the computer to partially or entirely execute actual processing based on the instruction of the program code, and the function of the embodiment can be realized by such processing.

20 Further, needless to mention, the program code read from the storage medium is written in a function expansion card inserted into the computer or a memory provided in a function expansion unit connected to the computer, and then based on the instruction of the

25 program code, actual processing is partially or entirely executed based on the function expansion card or by a CPU provided in the function expansion unit,

and the function of the embodiment can be realized by such processing.

As apparent from the foregoing, according to the embodiment of the invention, the switch is provided to enable the user to select the execution or non-execution of color reception. If the user selects the non-execution, by making no color reception ability declaration during reception, only a black and white image can be received.

10 The unit is provided to identify the type of a cartridge, and the switch is provided to enable the user to select the permission or non-permission of alternative memory reception. Thus, by using these in combination with the switch for selecting the execution of the color reception, the user can choose setting to prevent color image reception when an ink cartridge is a black only cartridge (color reception is executed, but alternative reception is not), or setting to execute alternative memory reception of a color image (color reception is executed, and alternative reception is also executed).

The unit is also provided to detect the residual quantity of each color ink contained in a loaded color cartridge. If there is black ink while any of the other is not remaining, by using the switch for selecting the permission of alternative memory reception, the user can choose setting to prevent color

image reception (color reception is executed, but
alternative reception is not), or setting to execute
alternative memory reception of a color image (color
reception is executed, and alternative reception is
5 also executed).

The switch is provided to select the automatic
recording of a received image by using the high-
definition color ink cartridge. Thus, when the
expensive high-definition color ink cartridge is
10 loaded, the user can choose the execution or non-
execution of automatic recording. By using this switch
in combination with the switch for selecting the
permission of alternative memory reception, the user
can choose setting to prevent color image reception (no
15 automatic recording is executing by using the high-
definition cartridge, and nor alternative reception),
or setting to execute alternative memory reception of a
color image (no automatic recording is executed by
using the high-definition cartridge, but alternative
20 reception is executed).

Therefore, since color reception is not permitted
when there is no color ink cartridge loaded in the
printer unit, the execution of alternative memory
reception of a received color image can be prevented,
25 and a reduction in a processing speed caused by a
limitation placed on a usable memory can be prevented.
In addition, since the usable memory needs to have only

an area of a minimum necessary limit, a memory capacity
can be saved, making it possible to reduce device
costs. Moreover, since a color cartridge is expensive,
user's request of no color reception in facsimile
5 reception can be satisfied.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223

WHAT IS CLAIMED IS:

1. A color image communication apparatus
comprising:

- 5 a communication circuit for performing
communications with an opposite device;
a printer unit for recording an image received by
the communication circuit in a recording medium;
a memory for storing the image;
10 setting means for setting validation or
invalidation of an alternative memory reception
function to store the received image in the memory if
printing is inexecutable in the printer unit; and
communication control means for making color
15 reception ability declaration in self machine ability
declaration for the communications with the opposite
device, if the alternative memory reception function is
set to be valid by the setting means.

2. A color image communication apparatus
20 comprising:
a communication circuit for performing
communications with an opposite device;
a printer unit for color or monochrome-printing an
image received by the communication circuit in a
25 recording medium;
a memory for storing the image;
detecting means for detecting a state of the

printer unit;

setting means for setting validation or
invalidation of an alternative memory reception
function to store the received image in the memory if
5 printing is inexecutable in the printer unit; and

communication control means for performing control
as to whether color reception ability declaration is
made in self machine ability declaration during call
incoming according to a detecting result of the
10 detecting means, if the alternative memory reception
function is set to be invalid by the setting means.

3. A color image communication apparatus
according to claim 2, wherein if the detecting means
15 detects the inexecutable state of printing in the
printer unit, the communication control means rejects a
call.

4. A color image communication apparatus
20 according to claim 2, wherein the communication control
means makes color reception ability declaration if the
color printing is enabled in the printer unit, and does
not make color reception declaration if color printing
is inexecutable while monochrome printing is enabled.

25 5. A color image communication apparatus
according to claim 2, wherein a color cartridge for

normal color printing and a high-definition color cartridge for high-definition color printing are selectively loaded in the printing unit, the image communication apparatus further comprises second
5 setting means for presetting permission or non-permission of received image printing carried out by using the high-definition color cartridge, and the communication control means makes no color reception ability declaration if the high-definition color
10 cartridge is loaded and non-permission of printing carried out by using the high-definition color cartridge is set by the second setting means.

6. A control method of a color image
15 communication apparatus including a communication circuit for performing communications with an opposite device, a printer unit for color or monochrome-printing an image received by the communication circuit in a recording medium, and a memory for storing the image,
20 comprising the steps of:

setting validation or invalidation of an alternative memory reception function to store the received image in the memory if printing is inexecutable in the printing unit; and
25 making color reception ability declaration in self machine ability declaration for the communications with the opposite device if the alternative memory reception

function is set to be valid in the setting step.

7. A control method of a color image
communication apparatus including a communication
5 circuit for performing communications with an opposite
device, a printer unit for color or monochrome-printing
an image received by the communication circuit in a
recording medium, and a memory for storing the image,
comprising the steps of:

10 setting validation or invalidation of an
alternative memory reception function to store the
received image in the memory if printing is
inexecutable in the printing unit;

detecting a state of the printer unit; and

15 performing control as to whether color reception
ability declaration is made in self machine ability
declaration during call incoming according to a
detecting result in the detecting step, if the
alternative memory reception function is set to be

20 invalid in the setting step.

8. A control method according to claim 7, wherein
if an inexecutable state of printing of the printer
unit is detected in the detecting step, a call is

25 rejected.

9. A control method according to claim 7, wherein

color reception ability declaration is made in self
machine ability declaration if color printing is
enabled in the printer unit, and color reception
ability declaration is not made if color printing is
5 inexecutable while monochrome printing is enabled.

10 10. A control method according to claim 7,
wherein a color cartridge for normal color printing and
a high-definition color cartridge for high-definition
color printing are selectively loaded in the printing
unit, permission or non-permission of received image
printing carried out by using the high-definition color
cartridge is preset, and no color reception ability
declaration is made in self machine ability declaration
15 if the high-definition color cartridge is loaded and
non-permission of printing carried out by using the
high-definition color cartridge is set in the second
setting step.

20 11. A computer readable storage medium storing:
a program used to cause a color image
communication apparatus to execute steps, the color
image communication apparatus including, a
communication circuit for performing communications
25 with an opposite device, a printer unit for color or
monochrome-printing an image received by the
communication circuit in a recording medium, and a

memory for storing the image, and

5 said program comprising the processing steps of:
setting validation or invalidation of an alternative
memory reception function to store the received image
in the memory if printing is inexecutable in the
printer unit; and making color reception ability
declaration in self machine ability declaration for the
communications with the opposite device if the
alternative memory reception function is set to be
10 valid in the setting step.

12. A computer readable storage medium storing:
a program used to cause a color image
communication apparatus to execute processing steps,
15 the color image communication apparatus including a
communication circuit for performing communications
with an opposite device, a printer unit for color or
monochrome-printing an image received by the
communication circuit in a recording medium, and a
20 memory for storing the image, and

 said program comprising the processing steps of:
setting validation or invalidation of an alternative
memory reception function to store the received image
in the memory if printing is inexecutable in the
25 printer unit; detecting a state of the printer unit;
and performing control as to whether color reception
ability declaration is made in self machine ability

[illegible]

ABSTRACT OF THE DISCLOSURE

In a facsimile device enabling color and monochrome images to be received, setting can be made to validate an alternative memory reception function.

5 With such setting, if setting is made to make color reception ability declaration in self machine ability declaration during call incoming and invalidate the alternative memory reception function, a printer unit judges whether color printing is enabled or not. If
10 color recording is enabled, then color reception ability declaration is made in self machine ability declaration. If color printing is not enabled, then color reception ability declaration is not made.

FIG. 1

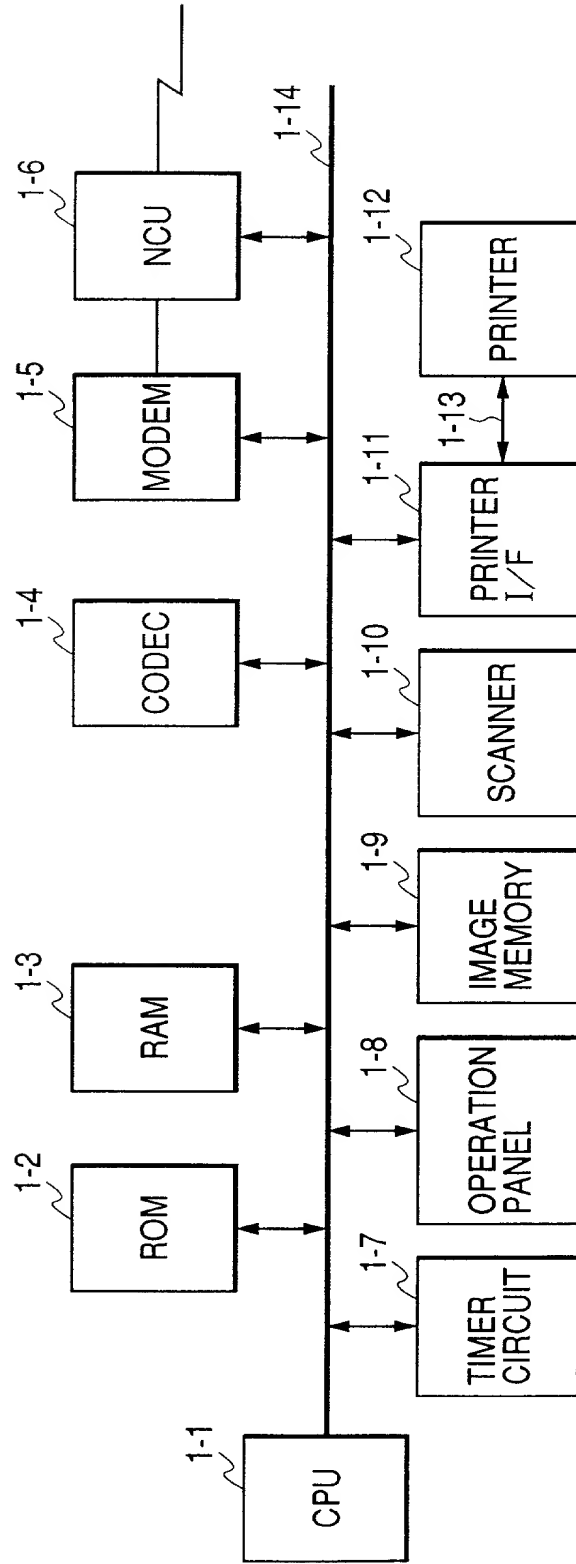


FIG. 2

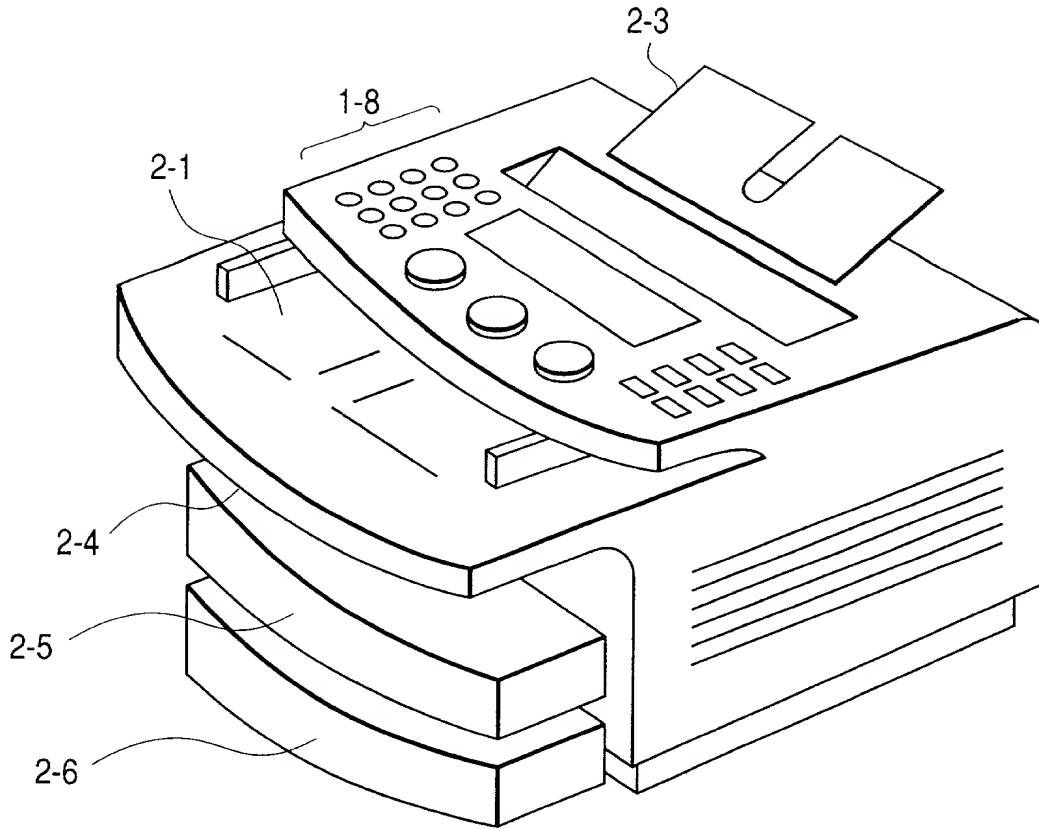


FIG. 3

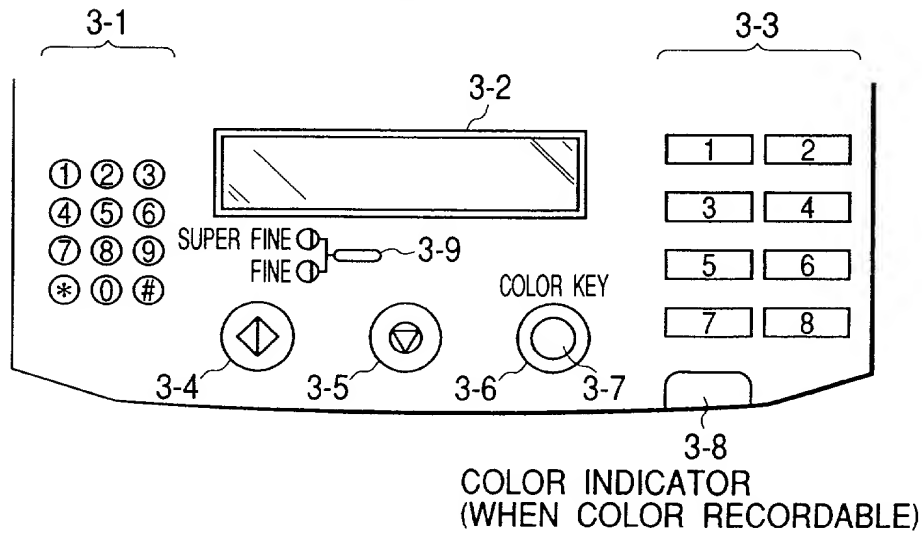


FIG. 4

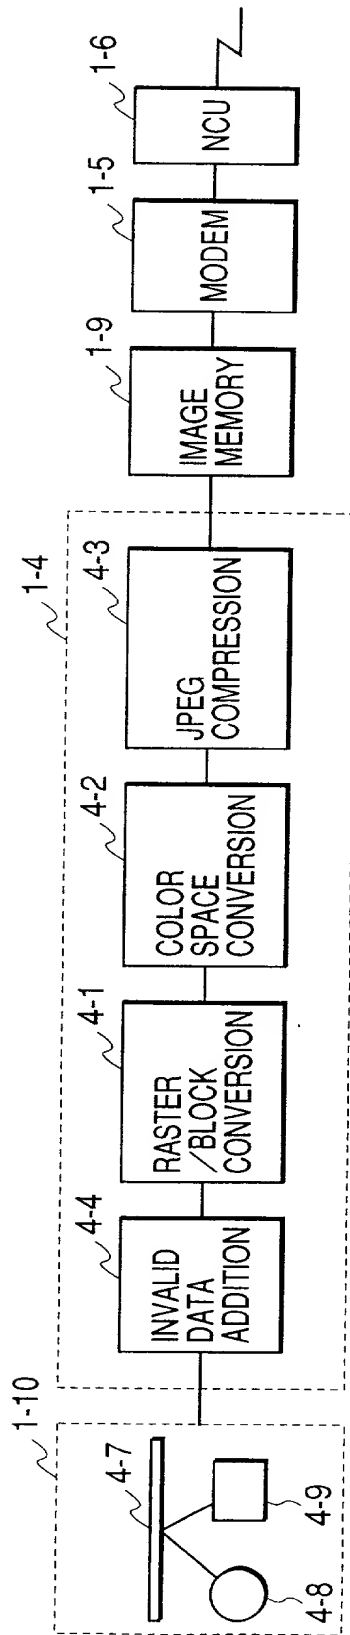


FIG. 5

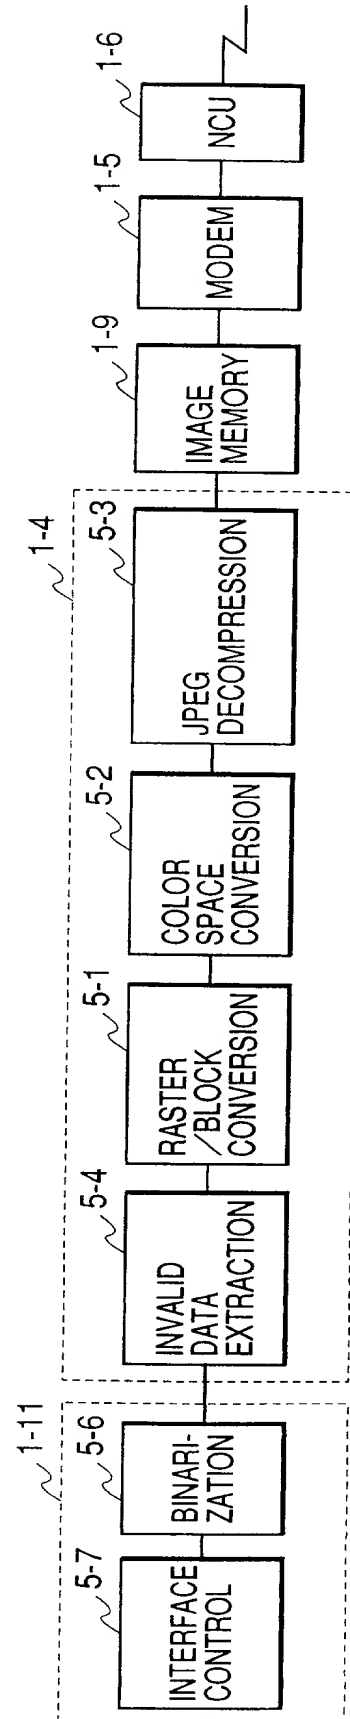


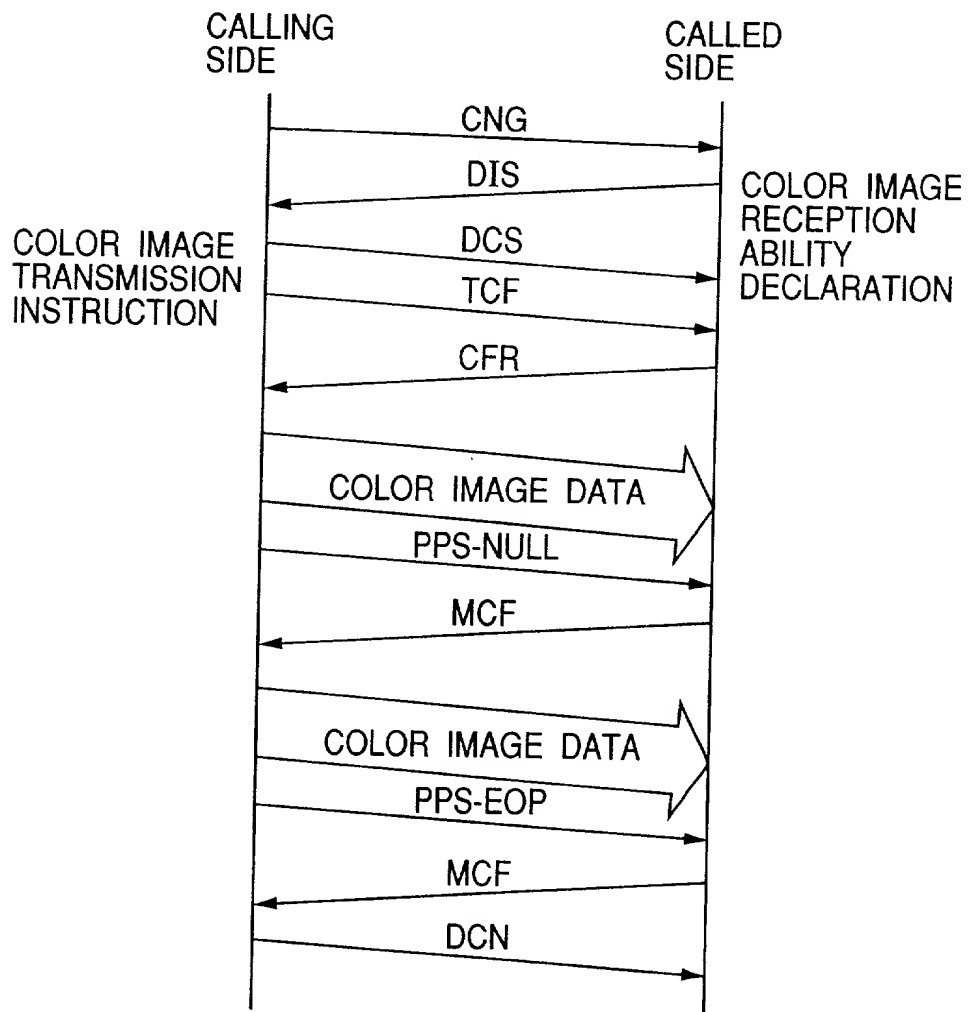
FIG. 6

FIG. 7

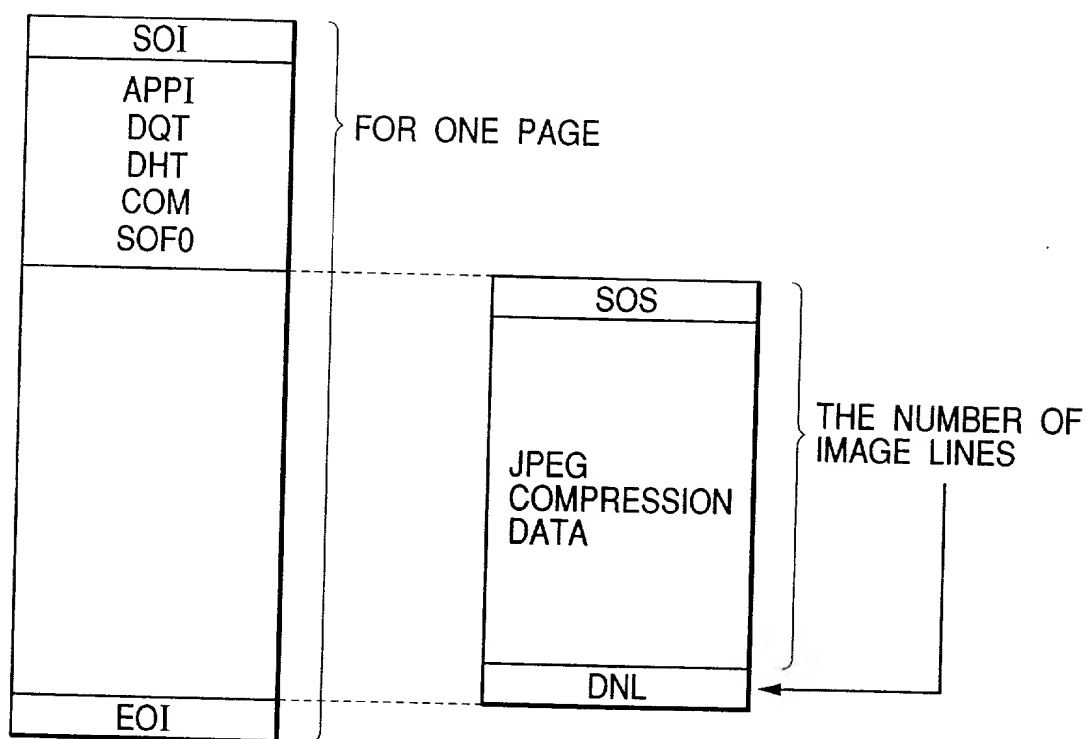


FIG. 8

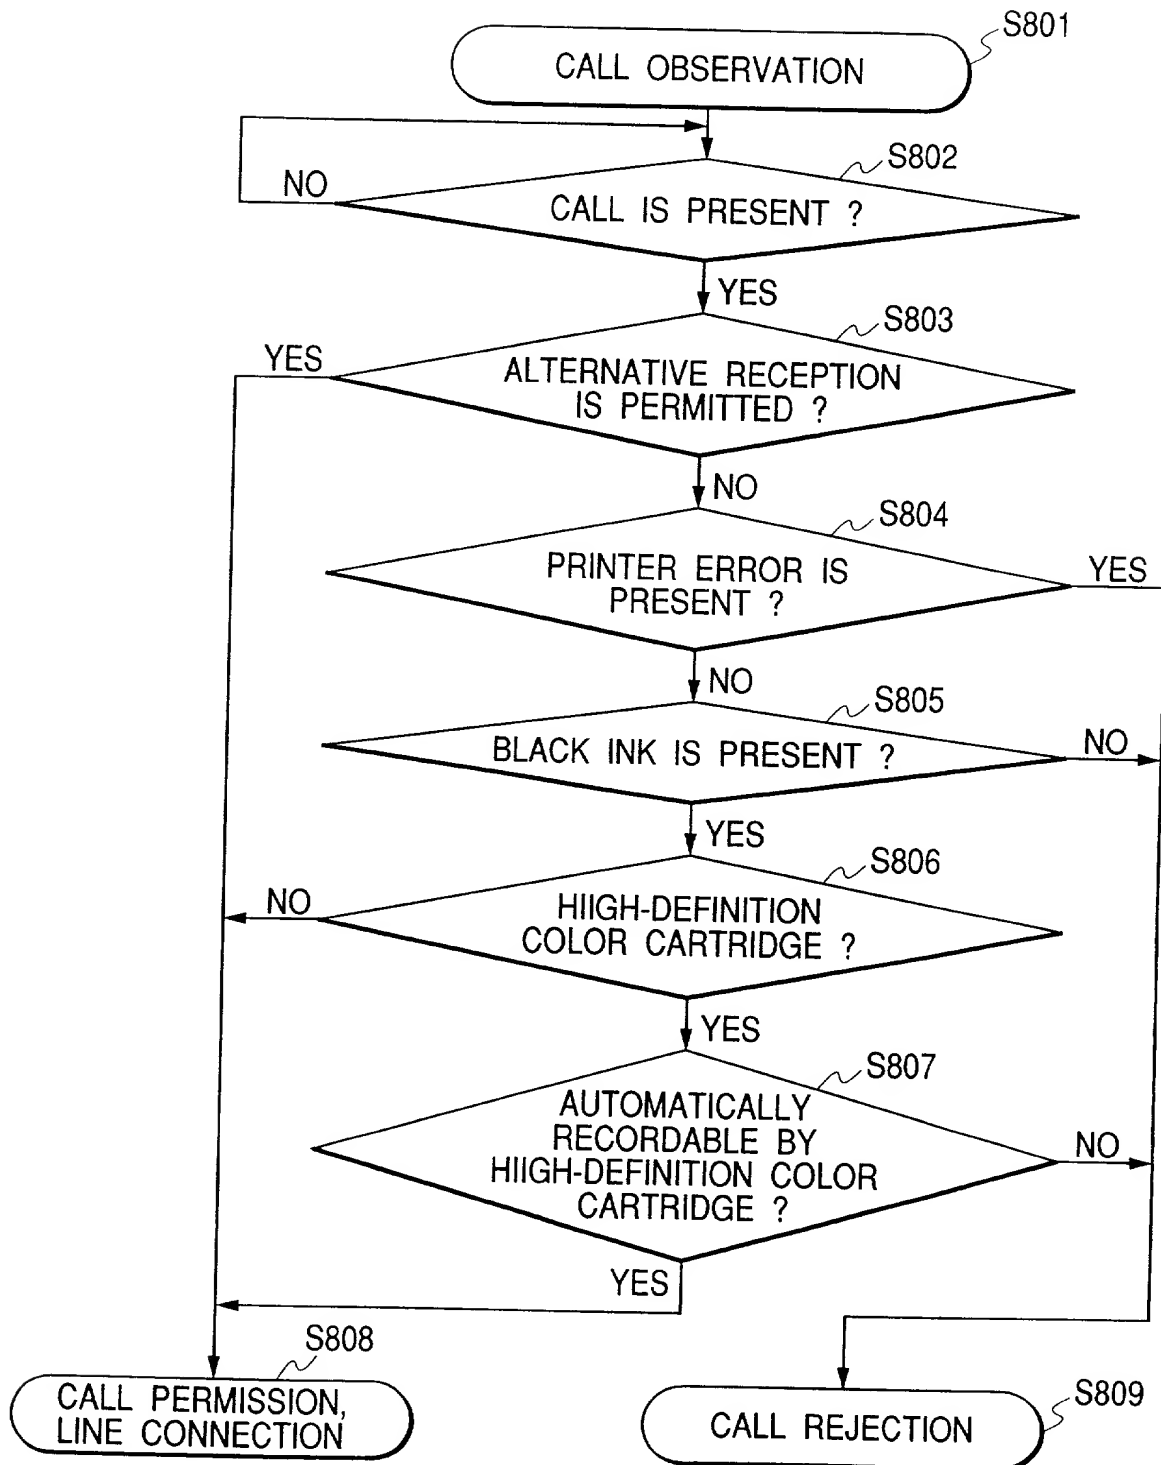


FIG. 9

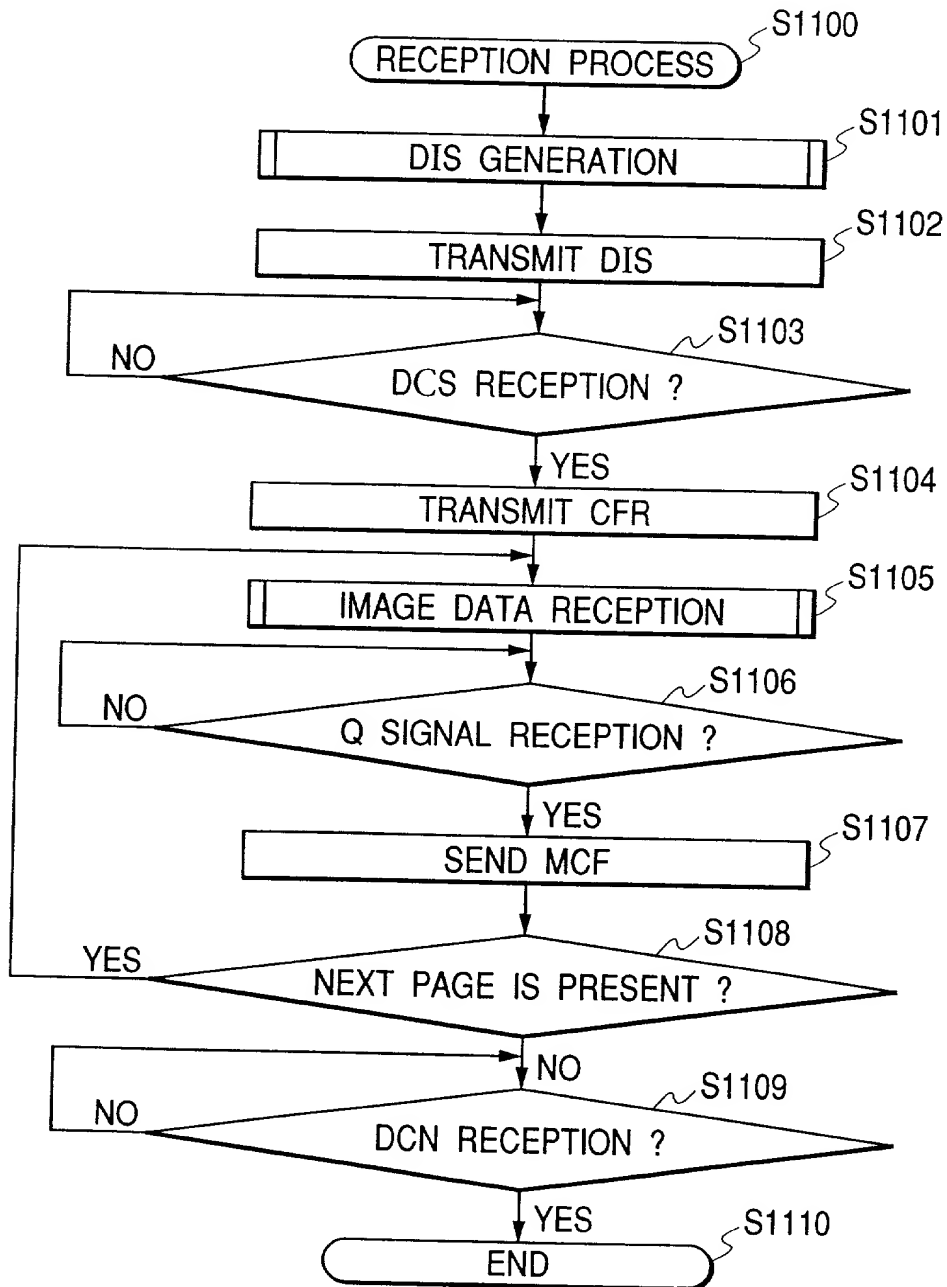


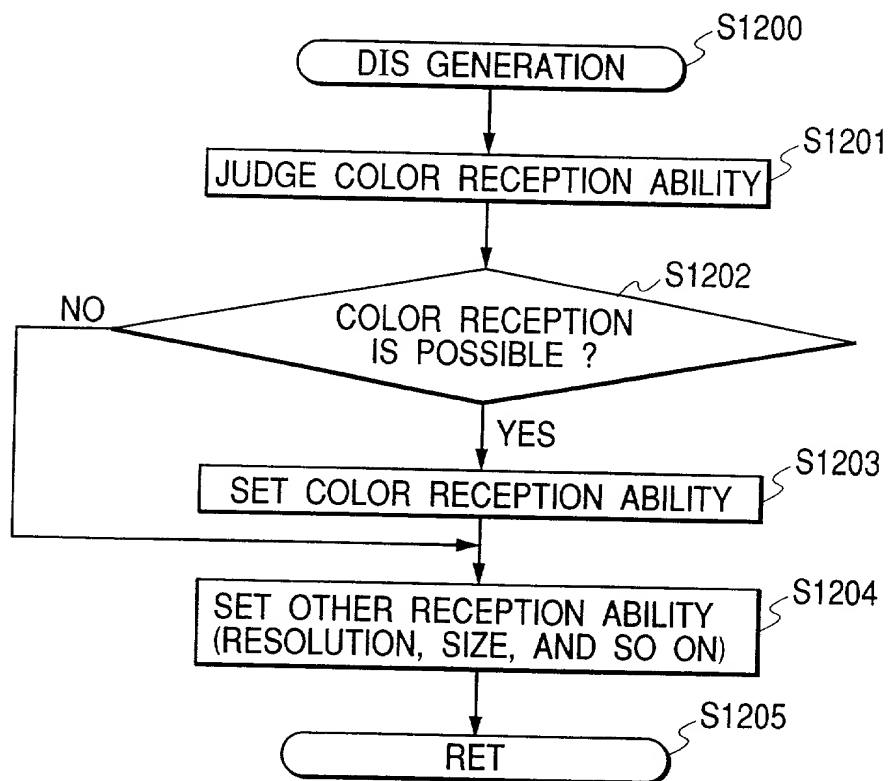
FIG. 10

FIG. 11

